



HRP 1000.1.5Y.KO Mass Comparator

More information on the website
radwag.com/en/info,w1,MPU



HRP 1000.1.5Y.KO Mass Comparator

The drawings, photos and graphics used are for illustrative purposes only.

Datasheet

	HRP 1000.1.5Y.KO Mass Comparator
Metrological parameters	
E1 Calibration Range	-
E2 Calibration Range	-
F1 Calibration Range	1000 kg
F2 Calibration Range	500 kg ÷ 1000 kg
M1 Calibration Range	100 kg ÷ 1000 kg
M2 Calibration Range	50 kg ÷ 1000 kg
Maximum capacity [Max]	1050 kg
Readability [d]	0,5 g
Standard repeatability [5% Max]	0,9 g
Standard repeatability [Max]	1,2 g
Permissible repeatability	2 g
Eccentric load deviation	0 – weighing pan self centering
Eccentricity (tested load)	1d / 1 mm
Electric compensation range	0 ÷ 1050 kg
Stabilization time	10 s
Adjustment	internal (automatic)
Physical parameters	
Display	10" graphic colour touchscreen
Weighing pan dimensions	1000×800 mm
Self-centering weighing pan dimensions	600×600 (extra charge) mm
Weighing unit dimensions with self-centering weighing pan	1010×800×275 mm
Controlling device dimensions	249×170×72 mm
Comparator packaging dimensions without self-centering weighing pan	1200×1000×440 mm
Comparator packaging dimensions with self-centering weighing pan	1200×1000×485 mm
Net weight	200 kg
Gross weight	269 kg
Communication interface	
Communication interface	2×USB-A, USB-C, HDMI, Ethernet, Wi-Fi, Hotspot
Environmental conditions	
Operating temperature	+15 ÷ +30 °C
Operating temperature change rate	±1°C/12h
Relative humidity	40% ÷ 60%
Relative humidity change rate	±5%/4h

Repeatability is expressed as a standard deviation determined for 6 ABBA cycles. Standard deviation is experimentally determined under ambient conditions for calibration of F2 class mass standards specified in OIML R111 (Table C.1.) document.

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Accessories

Self-centering pan for HRP KO comparator
 Additional modules
 Protective cover for balances
 Barcode scanners

THBR 2.0 System - Ambient Conditions Monitoring
 RS 232, RS 485 cables
 Receipt Printer
 Fingerprint Reader


Software

RAD-KEY
 RMCS System

RMCS Lite

Device dimensions

HRP 1000.1.5Y.KO Mass Comparator

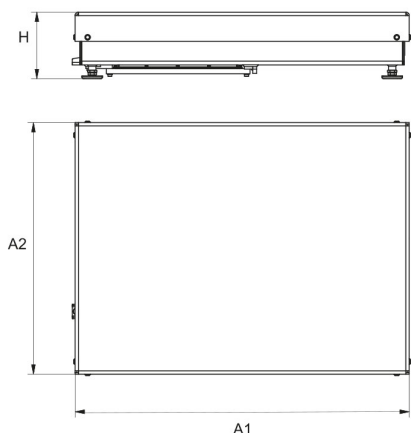

Type	A1	A2	H
HRP 200.5Y.KO	809	600	162
HRP 500.5Y.KO	809	600	162
HRP 1000.5Y.KO	1011	800	182
HRP 1500.5Y.KO	1250	1000	235
HRP 2000.5Y.KO	1250	1000	235

Dimensions in mm