



More information on the website  
[radwag.com/en/info,w1,XFM](http://radwag.com/en/info,w1,XFM)





















**WLC 21.X7 Precision Balance**



WLC 21.X7 Precision Balance

The drawings, photos and graphics used are for illustrative purposes only.

## Functions

- |   |   |   |  |
|---|---|---|--|
|  Autotest                    |  Dosing                |  Percent Weighing              |  Parts counting   |
|  Peak hold                   |  Formulation           |  Newton unit measurement       |  Statistics       |
|  Checkweighing               |  IR sensors            |  Under-pan weighing            |  GLP Procedures   |
|  Animal weighing             |  Density determination |  Ambient conditions monitoring |  Replaceable unit |
|  Statistical Quality Control |  ALIBI Memory          |  Mass for titrator             |  Wi-Fi            |

# Datasheet

WLC 21.X7 Precision Balance	
<b>Metrological parameters</b>	
Maximum capacity [Max]	21 kg
Readability [d]	1 g
Verification unit [e]	-
Tare range	-21 kg
Repeatability	0,8 g
Linearity	±3 g
Stabilization time	3 s
Adjustment	external
<b>Physical parameters</b>	
Leveling system	manual
Display	7" graphic colour touchscreen
Weighing pan dimensions	195×195 mm
Packaging dimensions	430×270×190 mm
Net weight	2,2 kg
Gross weight	3,8 kg
<b>Construction</b>	
Protection class	IP 43
<b>Components and software</b>	
Database capacity	7
<b>Communication interface</b>	
Communication interface	2×RS232 <sup>1</sup> , USB-A, USB-B, Ethernet, Wi-Fi
<b>Electrical parameters</b>	
Power supply	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 10 – 15VDC 0,6A max
<b>Environmental conditions</b>	
Operating temperature	+10 ÷ +40 °C

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile. 1 Barcode scanners, available as weighing instrument accessory, communicate with the instrument via RS232 interface exclusively.

\* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



## Accessories



Balance Storage Case  
Antivibration Tables  
Power Adapters  
RS 232 cables (scale - printer)  
Cigarette lighter receptacle power supply cables  
USB cable (scale - printer)  
Barcode scanners  
Under-pan weighing

RS 232, RS 485 cables  
Density determination KIT  
Displays  
Receipt Printer  
RS 232, RS 485 cables  
Protective cover for balances  
RS 232 cables (scale - printer)  
RS 232 – RS 485 Converter



## Software

## Device dimensions



### WLC 21.X7 Precision Balance

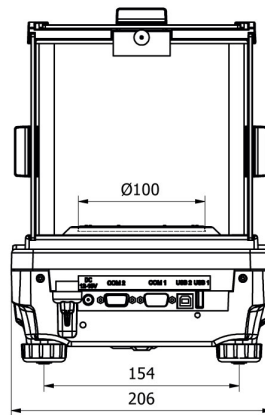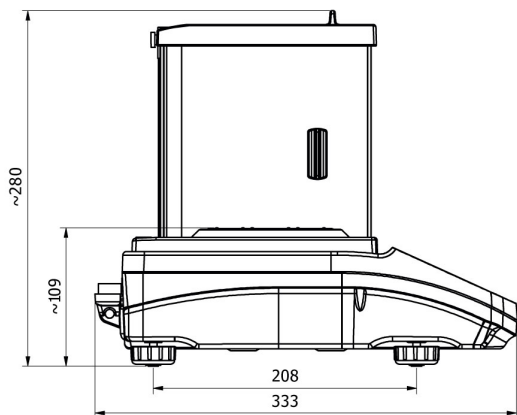

WLC X2, d = 0.001 mg

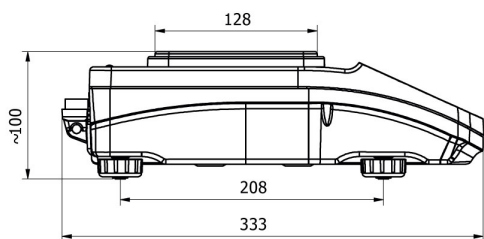

WLC X2, d = 0.01 mg

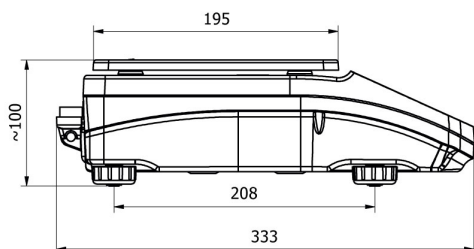

WLC X2, d = 0.1 mg